Door Schedule

Mark	Room	Type Mark	Width	Height	Thickness	Material	Finish	GLAZING	Frame Material	Frame Finish	Phase Created	Fire Rating	Hardware Description
100	VESTIBULE	E	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED	TG.	WOOD	PAINTED	SCHEMATIC DESIGN		6
101	DIRECTOR	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		4
102	Stroller Storage	D	5'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		8
103	FILE	F	5'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
104	KITCHEN	B	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED	TG.	WOOD	PAINTED	SCHEMATIC DESIGN		7
105	STAFF ROOM	B	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED	TG.	WOOD	PAINTED	SCHEMATIC DESIGN		7
106	TODDLER 1	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
107	NAP 5	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
108	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
109	INFANT-4	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
110	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
111	NAP 4	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
112	INFANT-3	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
113	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
114	NAP 3	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
115	INFANT-2	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
116	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
117	NAP 2	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
118	INFANT-1	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
119	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
120	NAP 1	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
121	ELECT. ROOM	E	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED	TG.	WOOD	PAINTED	SCHEMATIC DESIGN		5
122	TODDLER 12	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
123	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
124	NAP 16	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
125	TODDLER 11	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
126	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
127	NAP 15	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
128	TODDLER 10	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
129	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
130	NAP 14	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
131	TODDLER 9	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
132	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
133	NAP 13	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
134	WC	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		2
135	WC	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		2
136	WC	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		2
137	WC	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		2A
138	JAN / LAUNDRY	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		5
139	TODDLER 2	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
140	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
141	NAP 6	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
142	TODDLER 3	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
143	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
144	NAP 7	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
145	TODDLER 4	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
146	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
147	NAP 8	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
148	TODDLER 5	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
149	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
150	NAP 9	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
151	TODDLER 6	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
152	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
153	NAP 10	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
154	VESTIBULE	E	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED	TG.	WOOD	PAINTED	SCHEMATIC DESIGN		6
155	ENTRANCE	E	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED	TG.	WOOD	PAINTED	SCHEMATIC DESIGN		6
156	ELECT. ROOM	E	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED	TG.	WOOD	PAINTED	SCHEMATIC DESIGN		5
157	30 MONTHS TO 5 YEARS 1	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
158	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
159	30 MONTHS TO 5 YEARS 2	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
160	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
161	TODDLER 7	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
162	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
163	NAP 11	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
164	TODDLER 8	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
165	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
166	NAP 12	A	2'-6"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
200	30 MONTHS TO 5 YEARS 3	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
201	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
202	30 MONTHS TO 5 YEARS 4	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
203	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
204	30 MONTHS TO 5 YEARS 5	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
205	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
206	30 MONTHS TO 5 YEARS 6	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
207	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
208	30 MONTHS TO 5 YEARS 7	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
209	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
210	30 MONTHS TO 5 YEARS 8	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		1
211	WC	A	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		3
212	LAUNDRY	C	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		5
213	WC	C	2'-10"	7'-0"	0'-1 3/4"	WOOD	PAINTED		WOOD	PAINTED	SCHEMATIC DESIGN		2
214	KITCHEN	B	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED	TG.	WOOD	PAINTED	SCHEMATIC DESIGN		7
215	STAFF	B	3'-0"	7'-0"	0'-1 3/4"	WOOD	PAINTED	TG.	WOOD	PAINTED	SCHEMATIC DESIGN		7

HARDWARE GROUPS GENERAL NOTES:

1. IN ADDITION TO THE BELOW-NOTED ITEMS, IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT ALL OF THE CORRECT ITEMS ARE ORDERED TO ALLOW ALL FITTINGS TO BE FUNCTIONAL, COMPLETE, OPERATIONAL AND IN ACCORDANCE WITH THE BUILDING CODES OF ALL AUTHORITIES HAVING JURISDICTION.
2. ALL LOCKS TO BE MASTER-KEYED AS PER WILLOWBRAE STANDARDS.
3. ALL EXTERIOR DOORS TO RECEIVE LOCK GUARDS
4. FINISH HARDWARE TO INCLUDE SUPPLY AND INSTALL OF ALL ELECTRIC DOOR STRIKES AS REQUIRED
5. THE MAIN ENTRANCE TO THE SUITE IS TO BE EQUIPPED WITH AN ELECTRONICALLY CONTROLLED DOOR ACCESS SYSTEM FOR ENTRY INTO THE ACADEMY. THIS WORK IS TO BE INCLUDED IN THE SPECIFIED CASH ALLOWANCE FOR SECURITY SYSTEM. REVIEW WITH WILLOWBRAE STANDARDS, PROVIDED TO FRANCHISE SEPARATELY.
6. CONTRACTOR TO PROVIDE COMPLIANT HARDWARE FOR ALL DOORS REQUIRING A FIRE RESISTANCE RATING.

HARDWARE GROUPS:

HARDWARE GROUP 1: CLASSROOM
- BUTT HINGES
- LEVERSET (H-3C)
- FLOOR STOP
- DOOR MUTES

HARDWARE GROUP 2: WASHROOMS
- BUTT HINGES
- LEVERSET (H-3B)
- FLOOR STOP
- DOOR MUTES
- COAT HOOK H-2@ 54"/ 1350mm AFF

HARDWARE GROUP 2A: BARRIER-FREE WASHROOMS
- BUTT HINGES
- LEVERSET (H-3B)
- FLOOR STOP
- CLOSER
- DOOR MUTES
- COAT HOOK H-2@41"/ 1000mm AFF

HARDWARE GROUP 3: POCKET DOORS
- RECESSED PULL H-4
- CONTRACTOR-SUPPLIED POCKET DOOR SYSTEM INCLUDING TRACKS, FLOOR GUIDES AND ALL OTHER ASSOCIATED COMPONENTS
- NEOPRENE BLOCK OR DOOR MUTES


HARDWARE GROUP 4: OFFICE
- BUTT HINGES
- LEVERSET (H-3C)
- FLOOR STOP
- DOOR MUTES


HARDWARE GROUP 5: ELEC & MECH ROOMS, JANITOR/ LAUNDRY, STORAGE
- BUTT HINGES
- LEVERSET (H-3D)
- FLOOR STOP
- CLOSER
- DOOR MUTES


HARDWARE GROUP 6: VESTIBULE
- POWER DOOR OPERATOR (NOTE: CAMDEN COLUMN CM-75 FULL-HEIGHT PUSH PLATE OR SIMILAR, TO MEET NBC-AE 2019)
- CLOSER WITH INTEGRATED STOP
- SUITE SIDE: PANIC BAR/STRIKE
- DOOR MUTES


HARDWARE GROUP 7: STAFF, FOOD PREP
- BUTT HINGES
- LEVERSET (H-3A)
- CLOSER
- FLOOR STOP
- DOOR MUTES


HARDWARE GROUP 8: BI-FOLD DOORS
- CONTRACTOR-SUPPLIED POCKET DOOR SYSTEM INCLUDING TRACKS, FLOOR GUIDES AND ALL OTHER ASSOCIATED COMPONENTS












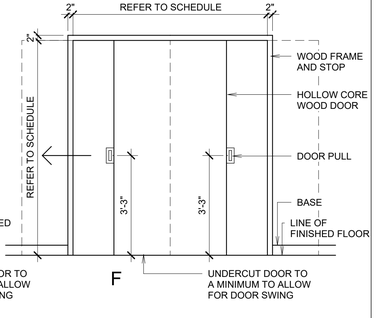

AXIN ARCHITECTURE LTD.
Contact: Fariba Gharaei
ARCHITECT AIBC
Phone: (604)-329-7090
Email:fariba@axinarch.com

For Review
12/04/2025 4:11:11 PM

COPYRIGHT RESERVED.
THESE DRAWINGS AND THE DESIGN ARE AND ALL TIME REMAIN THE EXCLUSIVE PROPERTY OF AXIN ARCHITECTURE LTD. AND CANNOT BE USED WITHOUT THE ARCHITECT'S THE ARCHITECT'S CONSENT. CONTRACTOR IS RESPONSIBLE FOR VERIFICATION ALL DIMENSIONS, ELEVATIONS, AND OTHER DATUM ON DRAWINGS. ANY DISCREPANCIES WITHIN THIS SET OF DRAWINGS OR WITHIN THIS SET OF DRAWINGS OR WITH OTHER CONSULTANTS' DRAWINGS AND EXISTING BUILDING TO BE REPORTED TO THE CONSULTANTS BE REPORTED TO THE CONSULTANTS IMMEDIATELY. ANY CHANGES MADE WITHOUT THE ARCHITECT'S WRITTEN PERMISSION SHALL BE THE CONTRACTOR'S SOLE RESPONSIBILITY.
DO NOT SCALE. DIMENSIONS GOVERN.

No.	Description	Date

ASH STREET DAYCARE
8765 ASH STREET,
VANCOUVER, BC

DOOR SCHEDULE

Project number	2537
Date	Issue Date
Drawn by	Author
Checked by	Checker

A501

Scale: As indicated

12/4/2025 4:10:53 PM