EXTERIOR DOOR TYPES



TYPE 1

EXTERIOR ALUMINUM THERMALLY BROKEN
TEMPERED / LAMINATED
SAFETY IGU

TYPE 2

STANLEY DURA GLIDE TELESCOPING 5200 SERIES
SINGLE SLIDE LEFT HAND

TYPE 3

EXTERIOR METAL
PRESSED STEEL FRAME
INSULATED CORE
c/w WEATHER SEAL
TEMPERED / LAMINATED
SAFETY IGU

TYPE 4

EXTERIOR METAL
PRESSED STEEL FRAME
INSULATED CORE
c/w WEATHER SEAL
FLUSH FACE

TYPE 5

EXTERIOR METAL
PRESSED STEEL FRAME
INSULATED CORE
c/w WEATHER SEAL
NARROW LITE

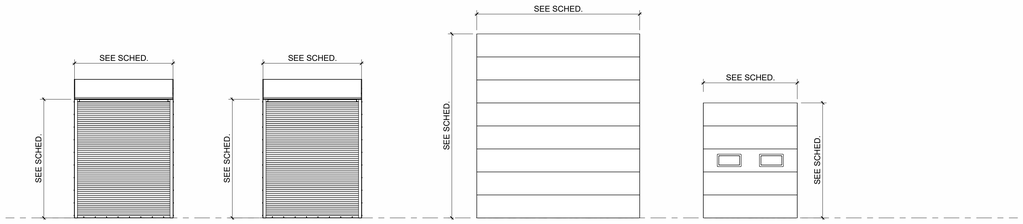

OH-1

EXTERIOR INSULATED ROLLING DOOR
SURFACE MOUNT INSULATED CORE c/w
WEATHER SEAL
CHAIN OPERATED
CLOPAY OR EQUIVALENT APPROVED

OH-1a

FIRE RATED INSULATED ROLLING DOOR
SURFACE MOUNT INSULATED CORE c/w
WEATHER SEAL
CHAIN OPERATED
CLOPAY OR EQUIVALENT APPROVED

OH-2 - GRADE DOOR

EXTERIOR INSULATED OVERHEAD DOOR
INSULATED CORE c/w WEATHER SEAL
POWER OPERATED

OH-3 - DOCK DOOR

EXTERIOR INSULATED OVERHEAD DOOR
INSULATED CORE c/w WEATHER SEAL
CHAIN OPERATED
VISION LITE

INTERIOR DOOR TYPES

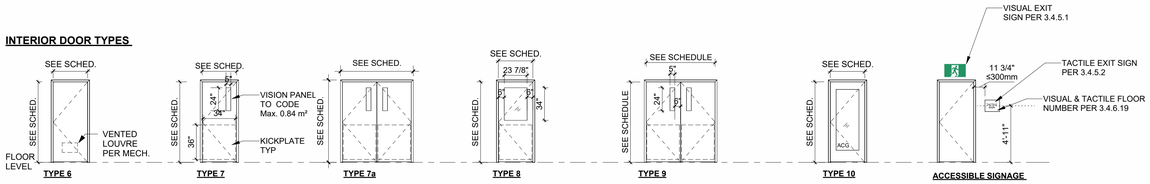

TYPE 6

INTERIOR METAL
PRESSED STEEL FRAME
HOLLOW CORE INSULATED CORE
FLUSH FACE
GRILL CUT WHERE APPLICABLE

TYPE 7

INTERIOR METAL
PRESSED STEEL FRAME
HOLLOW CORE INSULATED CORE
NARROW LITE

TYPE 7a

INTERIOR METAL
PRESSED STEEL FRAME
HOLLOW CORE INSULATED CORE
NARROW LITE

TYPE 8

INTERIOR METAL
PRESSED STEEL FRAME
HOLLOW CORE INSULATED CORE
HALF LITE

TYPE 9

CHASE DOOR - DURULITE INDUSTRIAL HEAVY DUTY IMPACT TRAFFIC DOOR
180° DOUBLE SWING
FLUSH HOLLOW METAL FRAMES
INSULATED CORE
NARROW LITE

TYPE 10

INTERIOR METAL
PRESSED STEEL FRAME
HOLLOW CORE
FULL LITE

ACCESSIBLE SIGNAGE

PROVIDE WHERE APPLICABLE

NOTE: PROVIDE WIRED GLASS AT FIRE RATED WALL
AT MAX OF 0.84 m² OR FIRE RATED CERAMIC GLASS

WINDOW SCHEDULE

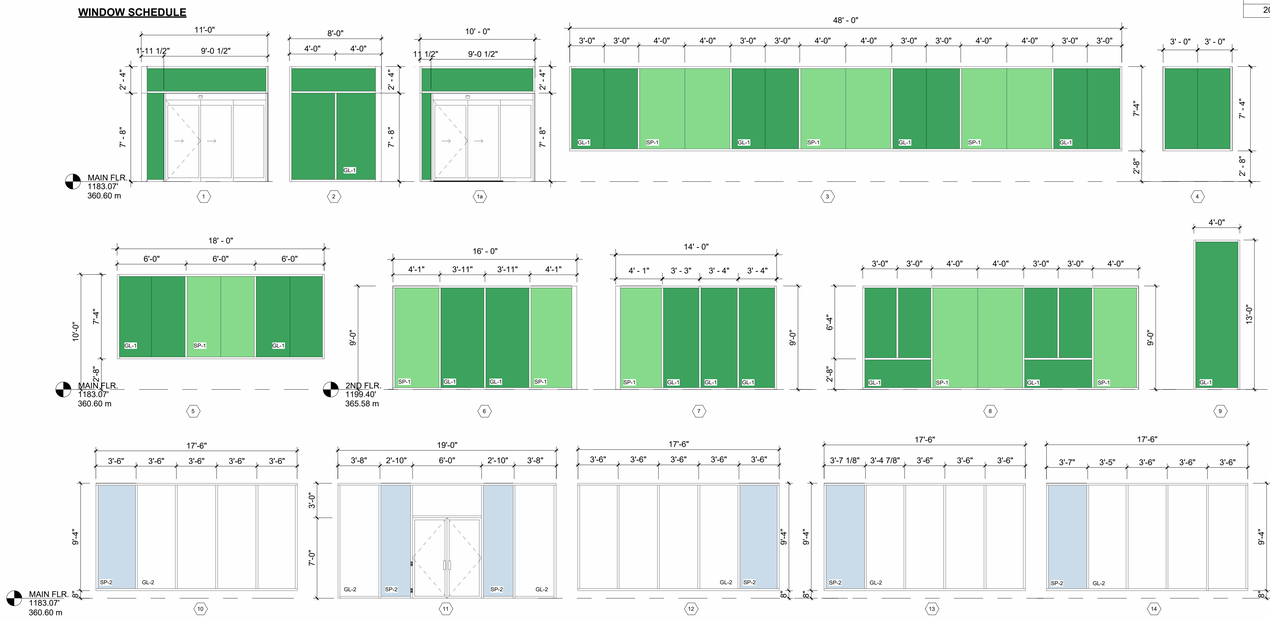

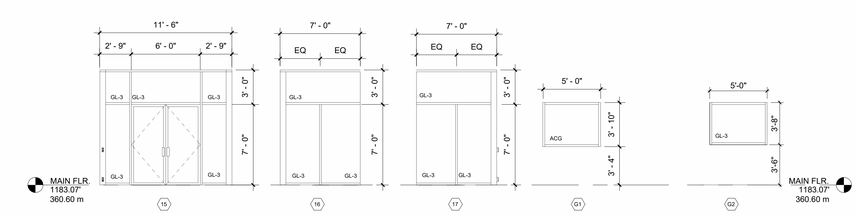

INTERIOR OFFICE GLAZING
FRAME TYPE: PRESSED STEEL, PRIMED AND PAINT

GLAZING SCHEDULE

ABB.	DESCRIPTION
GL-1	VISION GLASS GREEN TINT - CLEAR ANODIZED ALUMINUM FRAME DOUBLE GLAZED
GL-2	VISION GLASS BLUE TINT - CLEAR ANODIZED ALUMINUM FRAME
GL-3	VISION GLASS- CLEAR GLASS - CLEAR ANODIZED ALUMINUM FRAME
SP-1	GLASS GREEN TINT - FROSTED 50% ANODIZED ALUMINUM FRAME
SP-2	GLASS BLUE TINT - FROSTED 50% ANODIZED ALUMINUM FRAME
ACG	LAMINATED ACOUSTIC DOUBLE GLAZED (9/16" overall - 1/4" glass, 0.60" PVB, 1/4" glass) PRESSED STEEL FRAME - PAINTED
NOTE:	CURTAINWALL SYSTEM : ALUMICOR THERMAWALL 2600 OR APPROVE ALTERNATE

DOOR SCHEDULE

DOOR No.	LOCATION	TYPE	SIZE WIDTH	SIZE HEIGHT	DOOR MATERIAL	DOOR FINISH	DOOR FRR	DOOR GLAZING	FRAME MATERIAL	FRAME FINISH	FRAME FRR	HARDWARE GROUP	COMMENTS
MAIN FLR.													
001	EXIT STAIRS #1	4	3' - 0"	7' - 0"	HMI	PT-2	-	-	PS	PT-2	-	7	
001-1	EXIT STAIRS #1	7	3' - 0"	7' - 0"	HMI	PT	45 MIN	YES	PS	PT	45 MIN	6	
002	EXIT STAIRS #2	4	3' - 0"	7' - 0"	HMI	PT-2	-	-	PS	PT-2	-	7	
100	VESTIBULE	1	6' - 0"	7' - 0"	ALUM	ANOD	-	YES	ALUM	ANOD	-	BY SUPPLIER	POWER DOOR OPERATOR
100-1	SHOWROOM	1	6' - 0"	7' - 0"	ALUM	ANOD	-	YES	ALUM	ANOD	-	BY SUPPLIER	POWER DOOR OPERATOR
101	SHOWROOM	3	3' - 0"	7' - 0"	HMI	PT	-	YES	PS	PT	-	7	
101-1	SHOWROOM	8	3' - 0"	7' - 0"	HMI	PT-7/11	-	YES	PS	PT-7/11	-	6	
101-2	SHOWROOM	7a	6' - 0"	7' - 0"	HMI	PT	-	YES	PS	PT	-	6	
102	UNIVERSAL W/C	6	3' - 0"	7' - 0"	HWC	PT-11	-	-	PS	PT-11	-	1	POWER DOOR OPERATOR
103	MAIN ENTRANCE VESTIBULE	2	8' - 8 1/2"	7' - 1"	ALUM	ANOD	-	YES	ALUM	ANOD	-	BY SUPPLIER	5'0" CLEAR WIDTH
103-1	MAIN ENTRANCE VESTIBULE	2	8' - 8 1/2"	7' - 1"	ALUM	ANOD	-	YES	ALUM	ANOD	-	BY SUPPLIER	5'0" CLEAR WIDTH
104	WAREHOUSE	9	6' - 0"	7' - 0"	-	-	-	YES	PS	-	-	-	HEAVY DUTY IMPACT TRAFFIC
104-1	WAREHOUSE	9	6' - 0"	7' - 0"	-	-	-	YES	PS	-	-	-	HEAVY DUTY IMPACT TRAFFIC
104-2	WHOLESALE	7	3' - 0"	7' - 0"	HMI	PT	-	YES	PS	PT	-	6	
106	MANAGER OFFICE	10	3' - 0"	7' - 0"	HWC	PT-7	-	YES	PS	PT-7	-	5	
106-1	MANAGER OFFICE	4	3' - 0"	7' - 0"	HWC	PT-7	-	-	PS	PT-7	-	3	
107	OFFICE	10	3' - 0"	7' - 0"	HWC	PT-7	-	YES	PS	PT-7	-	5	
108	OFFICE	10	3' - 0"	7' - 0"	HWC	PT-7	-	YES	PS	PT-7	-	5	
109	OFFICE	10	3' - 0"	7' - 0"	HWC	PT-7	-	YES	PS	PT-7	-	5	
110	OFFICE	10	3' - 0"	7' - 0"	HWC	PT-7	-	YES	PS	PT-7	-	5	
111	OFFICE	10	3' - 0"	7' - 0"	HWC	PT-7	-	YES	PS	PT-7	-	5	
112	OFFICE	10	3' - 0"	7' - 0"	HWC	PT-7	-	YES	PS	PT-7	-	5	
113	TRADES ENTRY	3	3' - 0"	7' - 0"	HMI	PT-3	-	YES	PS	PT-3	-	-	
114	OFFICE	10	3' - 0"	7' - 0"	HWC	PT-7	-	YES	PS	PT-7	-	5	
115	OFFICE	10	3' - 0"	7' - 0"	HWC	PT-7	-	YES	PS	PT-7	-	5	
116	MEN W/C	6	3' - 0"	7' - 0"	HWC	PT-7	-	-	PS	PT-7	-	1	
117	WOMEN W/C	6	3' - 0"	7' - 0"	HWC	PT-7	-	-	PS	PT-7	-	1	
118	TRIP END RM	6	3' - 0"	7' - 0"	HWC	PT-7	-	-	PS	PT-7	-	1	
118A	SHOWER	6	3' - 0"	7' - 0"	HWC	PT-7	-	-	PS	PT-7	-	1	
119	SHIPPING OFFICE	8	3' - 0"	7' - 0"	HWC	PT-8	-	YES	PS	PT-8	-	6	
120	LOADING AREA	4	3' - 0"	7' - 0"	HMI	PT-2	45 MIN	-	PS	PT-2	45 MIN	7	
120-1	WAREHOUSE	7	3' - 0"	7' - 0"	HMI	PT-3	-	YES	PS	PT-3	-	8	
120-2	WAREHOUSE	7	3' - 0"	7' - 0"	HMI	PT-3	-	YES	PS	PT-3	-	7	
121	MECH RM	4	3' - 0"	7' - 0"	HMI	PT-8	45 MIN	-	PS	PT-8	45 MIN	3	
122	ELECT. RM	4	3' - 0"	7' - 0"	HMI	PT-3	45 MIN	-	PS	PT-3	45 MIN	3	
OH-1	WAREHOUSE	OH-1	8' - 0"	10' - 0"	STL	-	-	-	-	-	-	BY SUPPLIER	
OH-2	LOADING AREA	OH-3	8' - 0"	10' - 0"	STL	PT	-	YES	-	-	-	BY SUPPLIER	
OH-3	LOADING AREA	OH-3	8' - 0"	10' - 0"	STL	PT	-	YES	-	-	-	BY SUPPLIER	
OH-4	WAREHOUSE	OH-2	14' - 0"	16' - 0"	STL	PT	-	YES	-	-	-	BY SUPPLIER	
2ND FLR.													
200	STORAGE	4	3' - 0"	7' - 0"	HMI	PT-8	-	-	PS	PT-8	-	7	
200-1	EXIT STAIR #1	7	3' - 0"	7' - 0"	HMI	PT-8	45 MIN	YES	PS	PT-8	45 MIN	6	
200-2	EXIT STAIR #2	7	3' - 0"	7' - 0"	HMI	PT-8	45 MIN	YES	PS	PT-8	45 MIN	6	
200-3	STORAGE	OH-1a	8' - 0"	10' - 0"	STL	-	45 MIN	-	-	-	45 MIN	BY SUPPLIER	FIRE SHUTTER FUSE LINK
200-4	STORAGE	OH-1a	8' - 0"	10' - 0"	STL	-	45 MIN	-	-	-	45 MIN	BY SUPPLIER	FIRE SHUTTER FUSE LINK
201	LUNCH ROOM	5a	3' - 0"	7' - 0"	HWC	PT-8	-	YES	PS	PT-8	-	4	
202	MEETING RM	10	3' - 0"	7' - 0"	HMI	PT-8	-	YES	PS	PT-8	-	5	
202-1	MEETING RM	10	3' - 0"	7' - 0"	HMI	PT-8	-	YES	PS	PT-8	-	5	
203	SERVER RM	6	3' - 0"	7' - 0"	HWC	PT-8	-	-	PS	PT-8	-	3	
204	TOOL CRIB	7	3' - 0"	7' - 0"	HWC	PT-8	-	YES	PS	PT-8	-	3	
205	JAN.	6	3' - 0"	7' - 0"	HWC	PT-8	-	-	PS	PT-8	-	3	
206	MEN LOCKER	6	3' - 0"	7' - 0"	HWC	PT-8	-	-	PS	PT-8	-	2	
206-1	MEN LOCKER	6	3' - 0"	7' - 0"	HWC	PT-8	-	-	PS	PT-8	-	2	
207	WOMEN LOCKER	6	3' - 0"	7' - 0"	HWC	PT-8	-	-	PS	PT-8	-	2	
207-1	WOMEN W/C	6	3' - 0"	7' - 0"	HWC	PT-8	-	-	PS	PT-8	-	2	

GENERAL DOOR AND HARDWARE NOTES

1. ALL HARDWARE TO BE COMMERCIAL GRADE.
2. ALL LOCKS AND LATCHES TO BE LEVEL TYPE.
3. ALL LOCKS AND CYLINDERS MUST BE LOCKED TO THE BASE BUILDING MASTER KEYS SYSTEM.
4. SECURED EXIT DOOR c/w PANIC BAR AND ALLAN KEY.
5. VERIFY ON SITE WITH OWNER PRIOR TO CONSTRUCTION.
6. ROUGH OPENING FOR DOORS AND WINDOWS TO BE VERIFY ON SITE.
7. COMPLETE WITH WEATHERSTRIPPING AND THRESHOLD FOR ALL EXTERIOR DOORS.
8. COMPLETE WITH DOOR CLOSER AND LATCH w/ 3/4" THROW FOR ALL FIRE- RATE DOORS.
9. DOOR SWING AS INDICATED AS PLAN.
10. CONTRACTOR TO CONFIRM ALL DOOR HARDWARE AND LOCKING FUNCTIONS WITH OWNER.
11. COORDINATE WITH ELECTRICAL FOR ALL DOORS TO HAVE ELECTRIC STRIKES, CARD READERS AND OPERATORS.
12. PROVIDE SHOP DRAWINGS FOR REVIEW

ABBREVIATIONS

AL	ALUMINUM
ANOD	ANODIZED ALUMINUM
GL	GLASS
HMI	HOLLOW METAL (INSULATED)
HMC	HOLLOW METAL CORE
PF	PRE - FINISHED
PS	PRESSED STEEL
WD	SOLID WOOD CORE
HWD	HOLLOW WOOD CORE
STL	STEEL

HARDWARE GROUP SCHEDULE

GROUP 1
WOMEN'S WASHROOM 117, SHOWER ROOM, UNIVERSAL W/C

3 HINGES	TA714 4.5" x 4" x C626D
1 PRIVATE SET	ND40 RHO 626
1 SURFACE CLOSER	1900 AL
1 KICK PLATE	K10A C23D (24" X 34")
1 FLOOR STOP	GHS 209 C26D

GROUP 2
WOMEN'S WASHROOM , MEN'S WASHROOM, LOCKER ROOMS

3 HINGES	TA714 4.5" x 4" x C626D
1 PUSH PLATE	GSH 81 C23D (4 X 16)
1 DOOR PULL	GSH 4601-1 C23D 1 3/4"
1 SURFACE CLOSER	1900 AL
1 KICK PLATE	K10A C23D (24" X 34")
1 FLOOR STOP	GHS 209 C26D

GROUP 3
MECHANICAL ROOM, ELECTRICAL ROOM, JANITOR, STORAGE

3 HINGES	TA714 4.5" x 4" x C626D
1 STOREROOM SET	ND80PR6 RHO 626
1 SURFACE CLOSER	1900 AL
1 FLOOR STOP	GHS 209 C26D

GROUP 4
LUNCH/ TRAINING ROOM

3 HINGES	TA714 4.5" x 4" x C626D
1 PASSAGE SET	ND10 RHO 626
1 CLOSER	1900 AL
1 FLOOR STOP	GHS 209 C26D

GROUP 5
OFFICE , BOARDROOM

3 HINGES	TA714 4.5" x 4" x C626D
1 CLASSROOM SET	ND70 RHO 626
1 FLOOR STOP	GHS 209 C26D
1 DOOR SWEEP	

* PROVIDE ACOUSTIC DOOR SEAL KIT

GROUP 6
EXIT STAIRS

3 HINGES	TA714 4.5" x 4" x C626D
1 PASSAGE SET	ND10S RHO 626
1 SURFACE CLOSER	1900 AL
1 KICK PLATE	K10A C23D (24" X 34")
1 FLOOR STOP	GHS 209 C26D

GROUP 7
WAREHOUSE EXIT

3 HINGES	TA714 4.5" x 4" x C626D
1 EXITING DEVICE	9500-FR3-32D
1 SURFACE CLOSER	1900 AL
1 KICK PLATE	K10A C23D (24" X 34")
1 THRESHOLD	271A36
1 WEATHER STRIPPING	303APx17'
1 WELDED ASTRAGAL	18050 CNB 84
1 DOOR SWEEP	18100 CNB36

GROUP 8
STAFF ENTRY DOOR

3 HINGES	TA714 4.5" x 4" x C626D
1 STOREROOM SET	ND80P6 RHO 626
1 THRESHOLD	271A36
1 SURFACE CLOSER	1900 AL
1 WEATHER STRIPPING	303APx17'
1 DOOR SWEEP	18100 CNB36

REVISIONS :

FEBRUARY 13, 2026
ISSUED FOR TENDER

DECEMBER 19, 2025
ISSUED FOR BUILDING PERMIT

SEPTEMBER 15, 2025
ISSUED FOR DP APPLICATION - REV

JUNE 3, 2025
ISSUED FOR DP APPLICATION

PROJECT BY:
ANDREW SHERET LIMITED
EST 1892

BUILDER :

AUTHORITY HAVING JURISDICTION:
City of Kelowna

ALL DESIGNS AND OTHER INFORMATION SHOWN HEREON ARE FOR THE USE OF THIS SPECIFIC PROJECT ONLY AND SHALL NOT BE USED OTHERWISE WITHOUT THE WRITTEN PERMISSION FROM THIS OFFICE.

THIS DRAWING MUST NOT BE REPRODUCED WITHOUT THE WRITTEN PERMISSION FROM THIS OFFICE, AND ALL REPRODUCTION MUST SHOW THE NAME OF THIS OFFICE.

CONTRACTOR AND SUBCONTRACTORS SHALL VERIFY AND ARE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS ON THE JOB. THIS OFFICE MUST BE INFORMED OF ANY VARIATIONS FROM JOB CONDITIONS, DIMENSIONS AND CHANGES BETWEEN THIS DRAWING AND THE WORK.

THE ARCHITECT IS NOT RESPONSIBLE FOR THE METHOD AND QUALITY OF CONSTRUCTION OF THE CONTRACTOR AND THE SUBCONTRACTORS.

SEAL :

INTERFACE:
Suite 230
11590 Cambie Road
Richmond BC
Canada V6X 3Z5

T 604 821 1162
F 604 821 1146
www.interfacearchitecture.com

PROJECT :
ANDREW SHERET LTD.

1873 - 1875 SPALL ROAD
KELOWNA, B.C.

PROJECT NO. :
2428 ASKE

SCALE :
AS INDICATED

DATE :
DEC. 2024

DRAWN BY :
SP

CHECK BY :
JHSL

SHEET TITLE :
DOOR & WINDOW SCHEDULE

DRAWING SHEET :
A610